



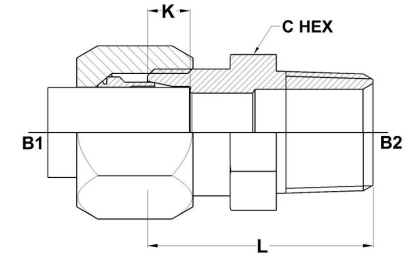

HYDROMATIK
connections par excellence

Flareless Bite Type Fittings

BT-MP Adapter Straight C2404 Series | SAE# 080102 / MS# 51819

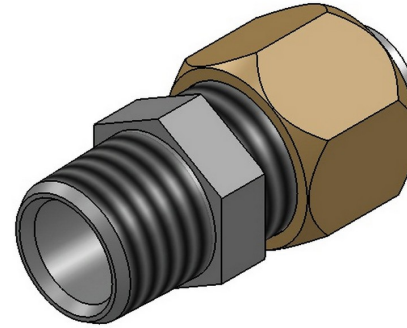

PART NO.SIZE	TUBE O.D.	B1 THREAD	B2 NPTF	B1 DRILL	B2 DRILL	L LGTH	K DEPTH	C HEX
C2404-02-02	1/8	5/16-24	1/8-27	0.093	0.188	1.04	0.188	0.438
C2404-02-04	1/8	5/16-24	1/4-18	0.093	0.281	1.24	0.188	0.625
C2404-03-02	3/16	3/8-24	1/8-27	0.125	0.188	1.09	0.234	0.438
C2404-04-02	1/4	7/16-20	1/8-27	0.203	0.188	1.12	0.234	0.500
C2404-04-04	1/4	7/16-20	1/4-18	0.203	0.281	1.32	0.234	0.625
C2404-04-06	1/4	7/16-20	3/8-18	0.203	0.406	1.33	0.234	0.812
C2404-04-08	1/4	7/16-20	1/2-14	0.203	0.531	1.58	0.234	0.937
C2404-05-02	5/16	1/2-20	1/8-27	0.234	0.188	1.12	0.250	0.562
C2404-05-04	5/16	1/2-20	1/4-18	0.234	0.281	1.32	0.250	0.625
C2404-05-06	5/16	1/2-20	3/8-18	0.234	0.406	1.33	0.250	0.812
C2404-06-02	3/8	9/16-18	1/8-27	0.281	0.188	1.15	0.250	0.625
C2404-06-04	3/8	9/16-18	1/4-18	0.281	0.281	1.34	0.250	0.625
C2404-06-06	3/8	9/16-18	3/8-18	0.281	0.406	1.35	0.250	0.812
C2404-06-08	3/8	9/16-18	1/2-14	0.281	0.531	1.60	0.250	0.937

C2404-08-04	1/2	3/4-16	1/4-18	0.422	0.281	1.44	0.305	0.812
C2404-08-06	1/2	3/4-16	3/8-18	0.422	0.406	1.44	0.305	0.812
C2404-08-08	1/2	3/4-16	1/2-14	0.422	0.531	1.69	0.305	0.937
C2404-08-12	1/2	3/4-16	3/4-14	0.422	0.719	1.76	0.305	1.125
C2404-10-06	5/8	7/8-14	3/8-18	0.500	0.406	1.56	0.350	0.937
C2404-10-08	5/8	7/8-14	1/2-14	0.500	0.531	1.75	0.350	0.937
C2404-10-12	5/8	7/8-14	3/4-14	0.500	0.719	1.82	0.350	1.125
C2404-12-08	3/4	1-1/16-12	1/2-14	0.656	0.531	1.88	0.350	1.125
C2404-12-12	3/4	1-1/16-12	3/4-14	0.656	0.719	1.88	0.350	1.125
C2404-12-16	3/4	1-1/16-12	1-11 1/2	0.656	0.938	2.07	0.350	1.375
C2404-14-12	7/8	1-3/16-12	3/4-14	0.719	0.719	1.88	0.350	1.250
C2404-16-12	1	1-5/16-12	3/4-14	0.875	0.719	1.88	0.415	1.375
C2404-16-16	1	1-5/16-12	1-11 1/2	0.875	0.938	2.07	0.415	1.375
C2404-20-20	1-1/4	1-5/8-12	1-1/4-11 1/2	1.093	1.250	2.18	0.415	1.688
C2404-24-20	1-1/2	1-7/8-12	1-1/4-11 1/2	1.344	1.250	2.25	0.485	2.000
C2404-24-24	1-1/2	1-7/8-12	1-1/2-11 1/2	1.344	1.500	2.28	0.485	2.000
C2404-32-32	2	2-1/2-12	2-11 1/2	1.813	1.938	2.46	0.485	2.625