

HYDROMATIK
connections par excellence

Test Points Couplings

TEST HOSE - TH TH |

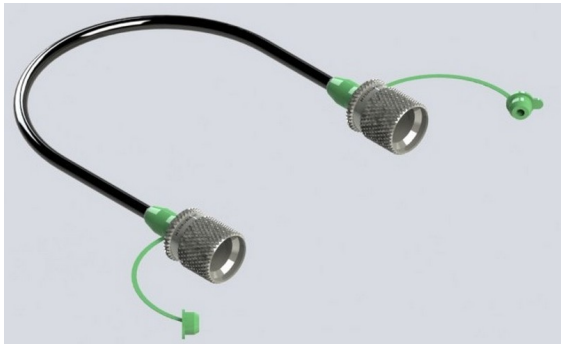



Part No.	Length
TH2000-200	200
TH2000-400	400
TH2000-630	630
TH2000-800	800
TH2000-1000	1000
TH2000-1500	1500
TH2000-2000	2000
TH2000-2500	2500
TH2000-3200	3200
TH2000-4000	4000

Note:
Max. Working Pressure 400 Bar
Test Hose Nominal Bore 2 mm
Min. Bending Radius 20 mm
Hose Construction: Hose Core & Cover: PA
Reinforcement: Synthetic Fibre
Burst Pressure: 1100 Bar